


Proware announces Fibre-to-SCSI RAID subsystem

Fibre Channel 2Gb-to-Ultra 160 RAID subsystem

July 2003 Taipei, Proware Technology Corp. is pleased to announce its newly innovated Fibre-to-SCSI RAID subsystem – the Simbolo SB-3160FS. It features a backplane design for sixteen hot-swappable disk drives, N+1 load sharing PFC power supplies, pure Aluminum case & component, specially designed airflow passages.

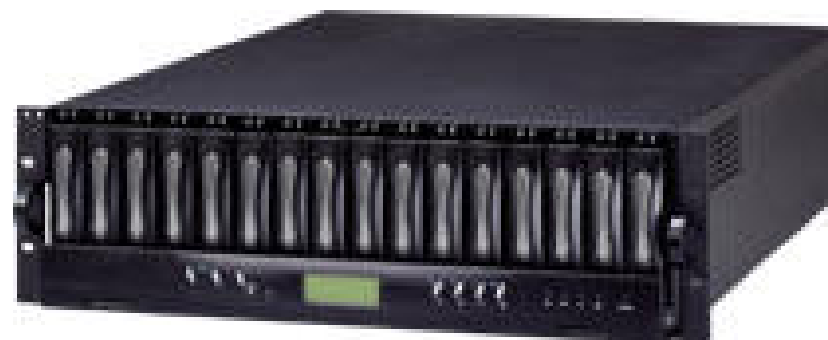

- Supports RAID levels 0, 1, 0+1, 3 and 5.
- Features an Intel i80303 64-bit RISC I/O processor.
- Supports up to 512MB of cache.
- Smart-function LCD display.
- High quality advanced cooling fans.
- Environmental monitoring unit.
- 2Gb/s FC-AL (Fibre Channel Arbitrated Loop) host port, dual loop optical SFP LC (short wave).
- Supports up to sixteen (16) 1" hot-swappable SCSI hard drives.
- Three 300W load-sharing hot-swappable power supplies.
- Supports hot spare and automatic hot rebuild.
- Industry standard 19" rack-mountable 3U chassis.
- Transparent data protection for all popular operating systems.
- Tagged command queuing for 512 commands, allows for overlapping data streams.
- Allows online capacity expansion within the enclosure.
- Dual host channels support clustering technology.
- Built-in serial port interface for remote event notification.
- Real time drive activity and status indicators.
- Local audible event notification alarm.
- Browser-based Java GUI management utility.