


## Proware announces 4Gb FC-to-SATA II RAID 6 subsystem

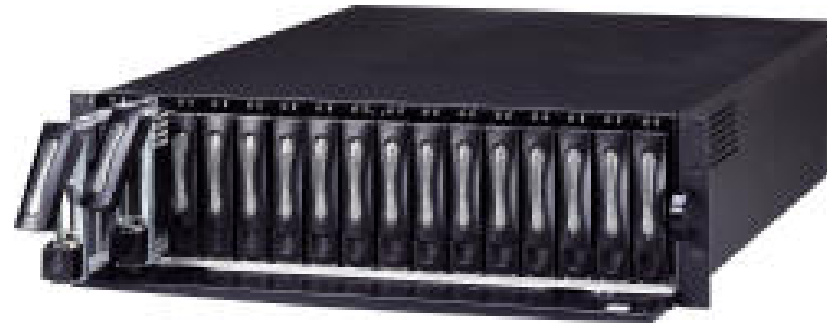

Sep. 2004 Taipei, Proware Technology Corp. is pleased to announce its newly innovated FC-to-SATA II RAID 6 subsystem – the Simbolo SB-3163-F4A3. It features a backplane design for sixteen hot-wappable disk drives, N+1 load sharing PFC power supplies, pecially designed airflow passages.

### Features

- Supports RAID levels 0, 1, 0+1, 3, 5, 6 and JBOD
- Features an Intel 80321 64-bit RISC I/O processor
- Supports up to 1024MB of cache
- Smart-function LCD display
- High quality advanced cooling fans

- Environmental monitoring unit
- Multiple RAID selection
- Array roaming
- S.M.A.R.T. support
- Online RAID level migration
- Background RAID Initialization
- E-mail notification
- 4Gb/s FC-AL (Fibre Channel Arbitrated Loop) host port, dual loop optical SFP LC (short wave)
- Supports up to sixteen (16) 1" hot-swappable S-ATAII hard drives
- Redundant 300W load-sharing hot-swappable power supplies
- Supports hot spare and automatic hot rebuild
- Industry standard 19" rack-mountable 3U chassis
- Transparent data protection for all popular operating systems
- Tagged command queuing for 256 commands, allows for overlapping data streams
- Allows online capacity expansion within the enclosure
- Dual host channels support clustering technology
- Built-in serial port interface for remote event notification
- Real time drive activity and status indicators
- Local audible event notification alarm
- Browser-based GUI management utility