

SB-3164E-GIA3

iSCSI-SATA II RAID subsystem



Unparalleled Performance

- ◆ Front-end 2 x 1Gb iSCSI
- ◆ Supports 802.3ad port trunking, Link Aggregation Control Protocol (LACP)
- ◆ High data bandwidth of system architecture by powerful 64-bit RAID processor

Unsurpassed Data Availability

- ◆ RAID 6 capability provides the highest level of data protection
- ◆ Supports snapshot-on-the-box w/o relying on host software

Exceptional Manageability Menu-driven front panel display

- ◆ Management GUI via serial console, SSH telnet and Web
- ◆ Event notification via Email and SNMP trap
- ◆ Menu-driven front panel display

Features

- ▶ Front-end 2 x 1Gb ports support independent access, fail-over or load-balancing (802.3ad port trunking, LACP)
- ▶ Supports iSCSI jumbo frame
- ▶ Supports Microsoft Multipath I/O (MPIO)
- ▶ Supports RAID levels 0, 1, 0+1, 3, 5, 6, 10, 30, 50, 60 and JBOD
- ▶ Local N-way mirror: Extension to RAID 1 level, N copies of the disk
- ▶ Global and dedicated hot spare disks
- ▶ Write-through or write-back cache policy for different application usage
- ▶ Dedicated or shared cache allocation for volume usage
- ▶ Supports greater than 2TB per volume set (64-bit LBA support)
- ▶ Supports manual or scheduling volume snapshot (up to 32 snapshot)
- ▶ Snapshot rollback mechanism
- ▶ On-line volume migration with no system down-time
- ▶ Online volume expansion
- ▶ Instant RAID volume availability and background initialization
- ▶ Supports S.M.A.R.T, NCQ and OOB Staggered Spin-up capable drives



Proware Technology Corp.

Tel: 886-2-2914-8001(Rep.) Fax: 886-2-2914-7975
http://www.proware.com.tw E-mail: info@proware.com.tw




Series Technical Specifications



Model Number: **SB-3164E-G1A3**

Form Factor: 3U 19-inch rackmount chassis	Configurable stripe size
RAID processor: Intel IOP341 64-bit	Instant RAID volume availability and background initialization support
RAID Level: 0, 1, 0+1, 3, 5, 6, 10, 30, 50, 60 and JBOD	Supports over 2TB per volume
N-way mirror (N copies of the disk)	Online consistency check
Cache memory: 512MB ~ 2048MB DDRII	Bad block auto-remapping
No. of channels (host+drive): 2 + 16	S.M.A.R.T. support
Host bus interface: 1Gb/s Ethernet	New disk insertion / removal detection
Drive bus interface: 3Gb/s SATA II	Auto volume rebuild
Hot-swap drive trays: Sixteen (16) 1-inch trays	Array roaming
Host access control: Read-Write & Read-Only	Audible alarm
Supports CHAP authentication	Password protection
802.3ad port trunking, LACP support	UPS connection
Jumbo frame support	Hot-swap power supplies: Two (2) 460W power supplies w/PFC
Maximum logical volume: up to 256	Cooling fans: 4
Maximum host connection: up to 32	Battery backup(Option)
Maximum host clustering: up to 16 for one logical volume	Power requirements: AC 90V ~ 264V full range
Manual/scheduling volume snapshot: up to 32	8A ~ 4A, 47Hz ~ 63Hz
Snapshot rollback mechanism support	Environmental
Supports Microsoft Multipath I/O (MPIO)	Relative Humidity: 10% ~ 85% Non-condensing
Global/dedicated cache configurable by volume	Operating Temp: 10°C ~ 40°C (50°F ~ 104°F)
Global and dedicated hot spare disks	Physical Dimensions: 133(H) x 482(W) x 600(D)mm
Online Volume migration	Weight: 24.7kgs (without drives)
Online Volume sets expansion	

Specification are subject to change without notice.
All company and product names are trademarks of their respective owners.

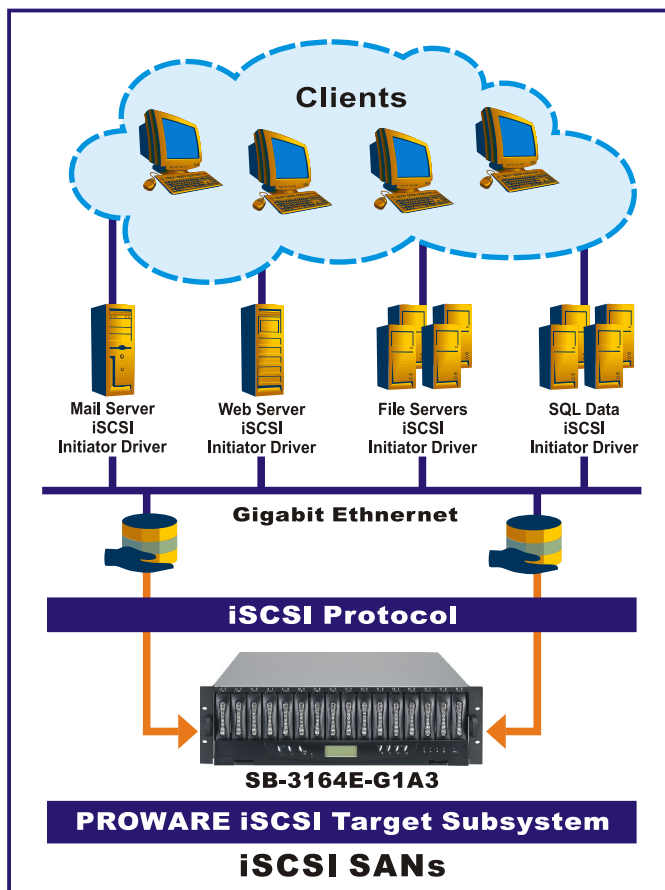

Advantages of iSCSI

- ▶ Familiar network technology and management
 - Reduces training and staff costs.
- ▶ Proven transport infrastructure
 - Increases reliability.
- ▶ Transition from 1Gigabit Ethernet to 10 Gigabit Ethernet and Beyond
 - Protects investment with simplified performance upgrades Scalability over long distances.
 - Enables remote data replication and disaster recovery.
- ▶ Brings Ethernet economics to storage
 - Enables lower total cost of ownership(TCO).
- ▶ **Consolidation** : iSCSI delivers seamless expandability. automatic load balancing, automatic storage provision, disaster recovery etc..
- ▶ **Virtualization** :
 - Scalable, highly available pool of storage.
 - Storage allocation and resizing on-demand.
 - Centralized management with remote access.
 - Security that protects logical volumes from unauthorized access.
 - Snapshot and replication.
 - Volume mirroring.
 - Multi-Path host access.