

**64 Bays
SAS to SAS/SATA
JBOD Subsystem**

User Manual

Revision 3.0

Table of Contents

Preface	3
Before You Begin	4
Safety Guidelines.....	4
Controller Configurations.....	4
Packaging, Shipment and Delivery.....	4
Unpacking the Shipping Carton.....	5
Chapter 1 Product Introduction.....	6
1.1 Technical Specifications	7
Chapter 2 Identifying Parts of the JBOD Subsystem	8
2.1 Main Components.....	8
2.1.1 Front View.....	8
2.1.1.1 LCD Display Panel LED.....	9
2.1.1.2 HDD Status LEDs	10
2.1.1.3 Menu Diagram.....	11
2.1.2 Rear View.....	12
2.3 Power Supply.....	13
2.4 Fan Module.....	14
2.4.1 Fan Module	15
2.4.2 Turbo Fan	16
2.4.3 Middle Fan.....	17
2.5 Disk Drive Installation into the Disk Slot.....	18
2.5.1 To install a disk drive in a disk tray:.....	19
Chapter 3 Getting Started with the Subsystem.....	22
3.1 Installing the Rails and Mounting into Rack	22
3.2 Removing the Disk Array from the Rack.....	35
3.3 Preparing the JBOD and Connecting to RAID Subsystem	37
3.4 Preparing the JBOD and Connecting to SAS HBA in Host System	37
3.5 Powering On	38
3.6 Powering Off.....	39
Chapter 4 Maintenance.....	40
4.1 Upgrading the JBOD Controller Firmware	40

Preface

About this manual

This manual provides information regarding the hardware features and installation of the **64Bay JBOD subsystem**. Information contained in the manual has been reviewed for accuracy, but not for product warranty because of the various environment/OS/settings. Information and specifications will be changed without further notice.

This manual uses section numbering for every topic being discussed for easy and convenient way of finding information in accordance with the user's needs. The following icons are being used for some details and information to be considered in going through with this manual:



NOTES:

These are notes that contain useful information and tips that the user must give attention to in going through with the subsystem operation.



IMPORTANT!

These are the important information that the user must remember.



WARNING!

These are the warnings that the user must follow to avoid unnecessary errors and bodily injury during hardware and software operation of the subsystem.



CAUTION:

These are the cautions that user must be aware of to prevent damage to the subsystem and/or its components.

Copyright

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written consent.

Trademarks

All products and trade names used in this document are trademarks or registered trademarks of their respective owners.

Changes

The material in this document is for information only and is subject to change without notice.

Before You Begin

Before going through with this manual, you should read and focus on the following safety guidelines. Notes about the subsystem's controller configuration and the product packaging and delivery are also included here.

Safety Guidelines

To provide reasonable protection against any harm on the part of the user and to obtain maximum performance, user is advised to be aware of the following safety guidelines particularly in handling hardware components:

Upon receiving of the product:

- ❖ Place the product in its proper location.
- ❖ Do not try to lift it by yourself alone. Two or more persons are needed to remove or lift the product to its packaging. To avoid unnecessary dropping out, make sure that somebody is around for immediate assistance.
- ❖ It should be handled with care to avoid dropping that may cause damage to the product. Always use the correct lifting procedures.

Upon installing of the product:

- ❖ Ambient temperature is very important for the installation site. It must not exceed 30°C. Due to seasonal climate changes; regulate the installation site temperature making it not to exceed the allowed ambient temperature.
- ❖ Before plugging-in any power cords, cables and connectors, make sure that the power switches are turned off. Disconnect first any power connection if the power supply module is being removed from the enclosure.
- ❖ Outlets must be accessible to the equipment.
- ❖ All external connections should be made using shielded cables and as much as possible should not be performed by bare hand. Using anti-static hand gloves is recommended.
- ❖ In installing each component, secure all the mounting screws and locks. Make sure that all screws are fully tightened. Follow correctly all the listed procedures in this manual for reliable performance.

Controller Configurations

This JBOD subsystem supports single JBOD controller configurations.

Packaging, Shipment and Delivery

- ❖ Before removing the subsystem from the shipping carton, you should visually inspect the physical condition of the shipping carton.
- ❖ Unpack and verify that the contents of the shipping carton are complete and in good condition.
- ❖ Exterior damage to the shipping carton may indicate that the contents of the carton are damaged.
- ❖ If any damage is found, do not remove the components; contact the dealer where you purchased the subsystem for further instructions.

Unpacking the Shipping Carton

The shipping carton contains the following:

	JBOD Subsystem Unit
	64 pairs of HDD side brackets
	Two (2) Power cords
	Two (2) mini SAS HD cables
	Two (2) serial cables DB9-to-DB9
	Slide rail
	Key of Top Cover
	Screws



NOTE: If any damage is found, contact the dealer or vendor for assistance.

Chapter 1 Product Introduction



The 64 bays JBOD Subsystem

The JBOD subsystem is a 19-inch 4U rackmount JBOD unit. It is a versatile SAS3 / SATA3 disk expansion system, ideal for high capacity and scalability storage in IT demands. It offers high density storage, hardware redundancy and easily integrates into versatile applications that request high performance and high scalability.

This JBOD subsystem comes with dual SAS Expander JBOD configuration. It features a modular architecture for key components which ease system maintenance and management.

Highest Density Available

- 4U chassis with 64 bays carriers
- Support the 3.5" enterprise class SAS3/SATA3 HDD drives

High Availability

- Dual SAS Expander JBOD consist of four 4x mini SAS HD ports

Power Supply

- Power supply and cooling system contained in 1 module for efficient cooling
- Two 1200W redundant hot swappable power supplies

Enclosure

- Incorporates SAS Expander on disk backplane for maximum signal integrity
- Utilizes industry-standard SCSI enclosure services (SES) to monitor enclosure and disk environmental conditions

Enclosure monitoring

- S.E.S. support for standard enclosure management
- System LED indications
- Fan speed monitoring
- Power supply monitoring
- System voltage monitoring
- System temperature monitoring
- System alarm

1.1 Technical Specifications


JBOD	Redundant
Host Interface	Two 4x mini SAS HD (12Gb/s)
Disk Interface	12Gb/s SAS, 6Gb/s SATA
SAS expansion	Two 4x mini SAS HD (12Gb/s)
Enclosure	
Platform	Rackmount
Form Factor	4U
# of Hot Swap Trays	64
Tray Lock	Yes
Disk Status Indicator	Access / Fail LED
Disk Backplane	SAS3 / SATA3
# of PS/Fan Modules	1200W x 2 (80 PLUS)
# of Fans	15
Monitor port support	Yes
Power requirements	AC 100V~127V, 50/60Hz, 10A (Total Power 800W Max.) AC 200V~240V, 50/60Hz, 8A (Total Power 1200W Max.)
Environmental	
Relative Humidity	10% ~ 85% Non-condensing
Operating Temperature	10°C ~ 40°C (50°F ~ 104°F)
Physical Dimension	880(L) x 482.6(W) x 177(H) mm
Weight (Without Disk)	43.5 / 45 Kg

Specification is subject to change without notice.

Chapter 2 Identifying Parts of the JBOD Subsystem

2.1 Main Components

2.1.1 Front View

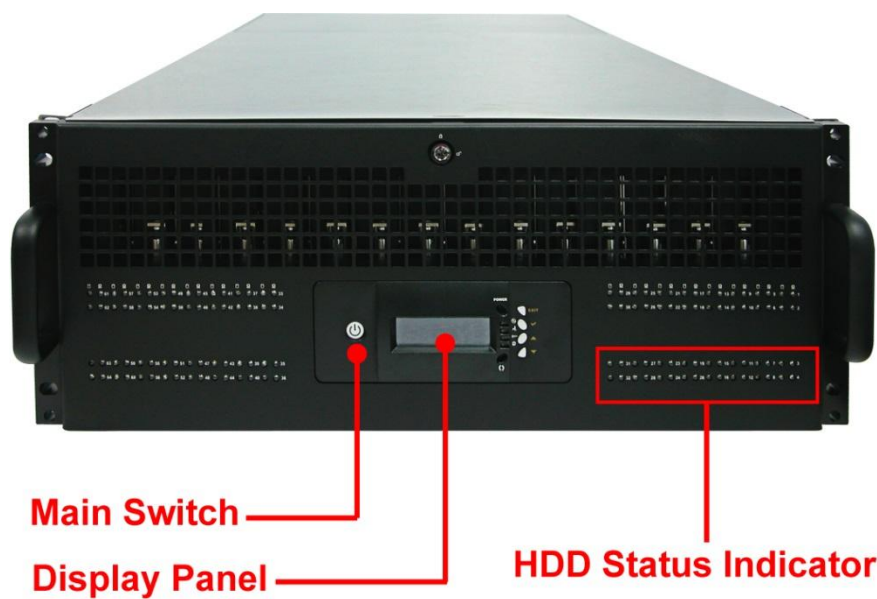

IMPORTANT: When powering off the JBOD subsystem, Shutdown the RAID controller first then turn off first the Main Switch and allow at least 4 minutes for the subsystem to shutdown properly.

2.1.1.1 LCD Display Panel LED




Part	Function
Power LED	Green indicates power is ON.

Main Switch Button	
Flashing Blue	Indicates that the power cords are inserted and/or indicates the 2 power supply switches are turn on.
Light Blue	Indicates that the sytem is on.
No Light	Indicates that the whole system is power off.


2.1.1.2 HDD Status LEDs

The Front Panel shows the disk drives status.

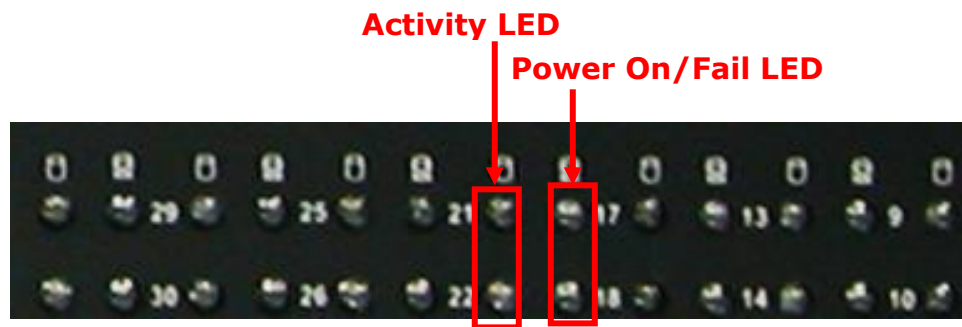


Indicator	Color	Description
Activity LED	Blue Blinking	Indicates the disk drive is busy or being accessed.
Power On/Fail LED	Green	Indicates the disk drive in this slot is good.
	RED	Indicates the disk drive in this slot is defective or failed.
	LED is off	Indicates there is no disk drive in this slot.

2.1.1.3 Menu Diagram

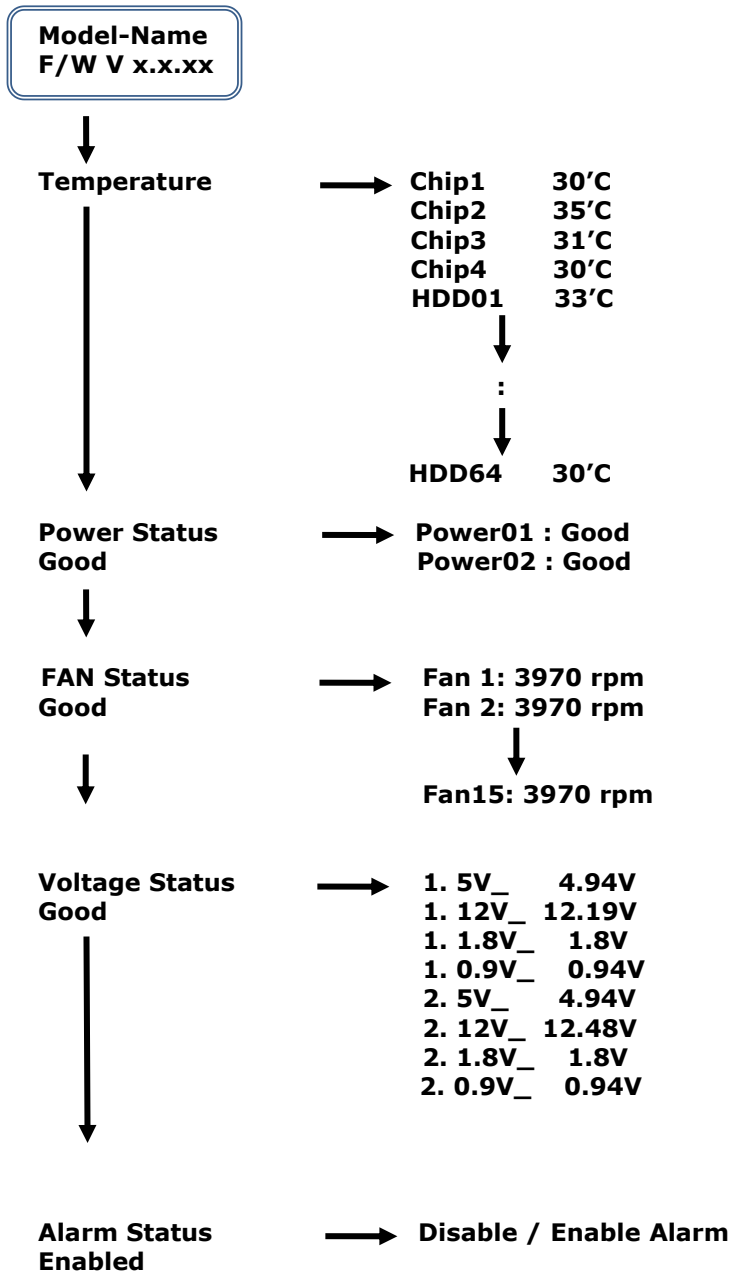

2.1.2 Rear View

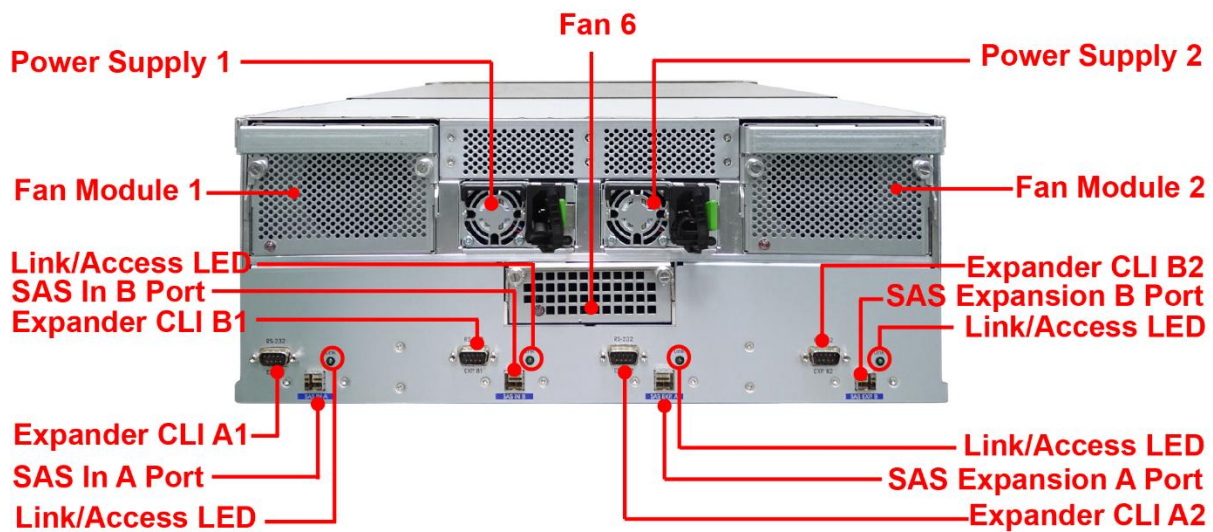

NOTE:

The JBOD subsystem is logically divided into two enclosures for hardware monitoring.

The functions of the Expander are as follows:

Module:	Function/Description:
Expander CLI A1 & A2 (RS-232 Port)	Use to upgrade the firmware of the expander module. Connect the serial cable DB9-to-DB9 to your system's serial port. (for Expander 1)
Expander CLI B1 & B2 (RS-232 Port)	Use to upgrade the firmware of the expander module. Connect the serial cable DB9-to-DB9 to your system's serial port. (for Expander 2)
SAS In Port	Use to connect to SAS HBA or to RAID subsystem's SAS Expansion Port.
SAS Expansion Port	Use to connect to the SAS In Port of another JBOD subsystem.
Link/Access LED	Green indicates SAS IN/ Expansion Port has connected or linked. Green Blinking indicates SAS IN/ Expansion Port is being accessed.

2.3 Power Supply

The 64bay JBOD subsystem contains **1200W 80plus Power Supply**. All Power Supply are inserted at the rear of the chassis.



Front Panel



Rear Side



NOTE:

Power Requirements:


AC 100V~127V, 50/60Hz, 10A (Total Power 800W Max.)

AC 200V~240V, 50/60Hz, 8A (Total Power 1200W Max.)


Full Disks loading require 1200W @220V AC

2.4 Fan Module

The 64bay JBOD subsystem contains 15 fans.

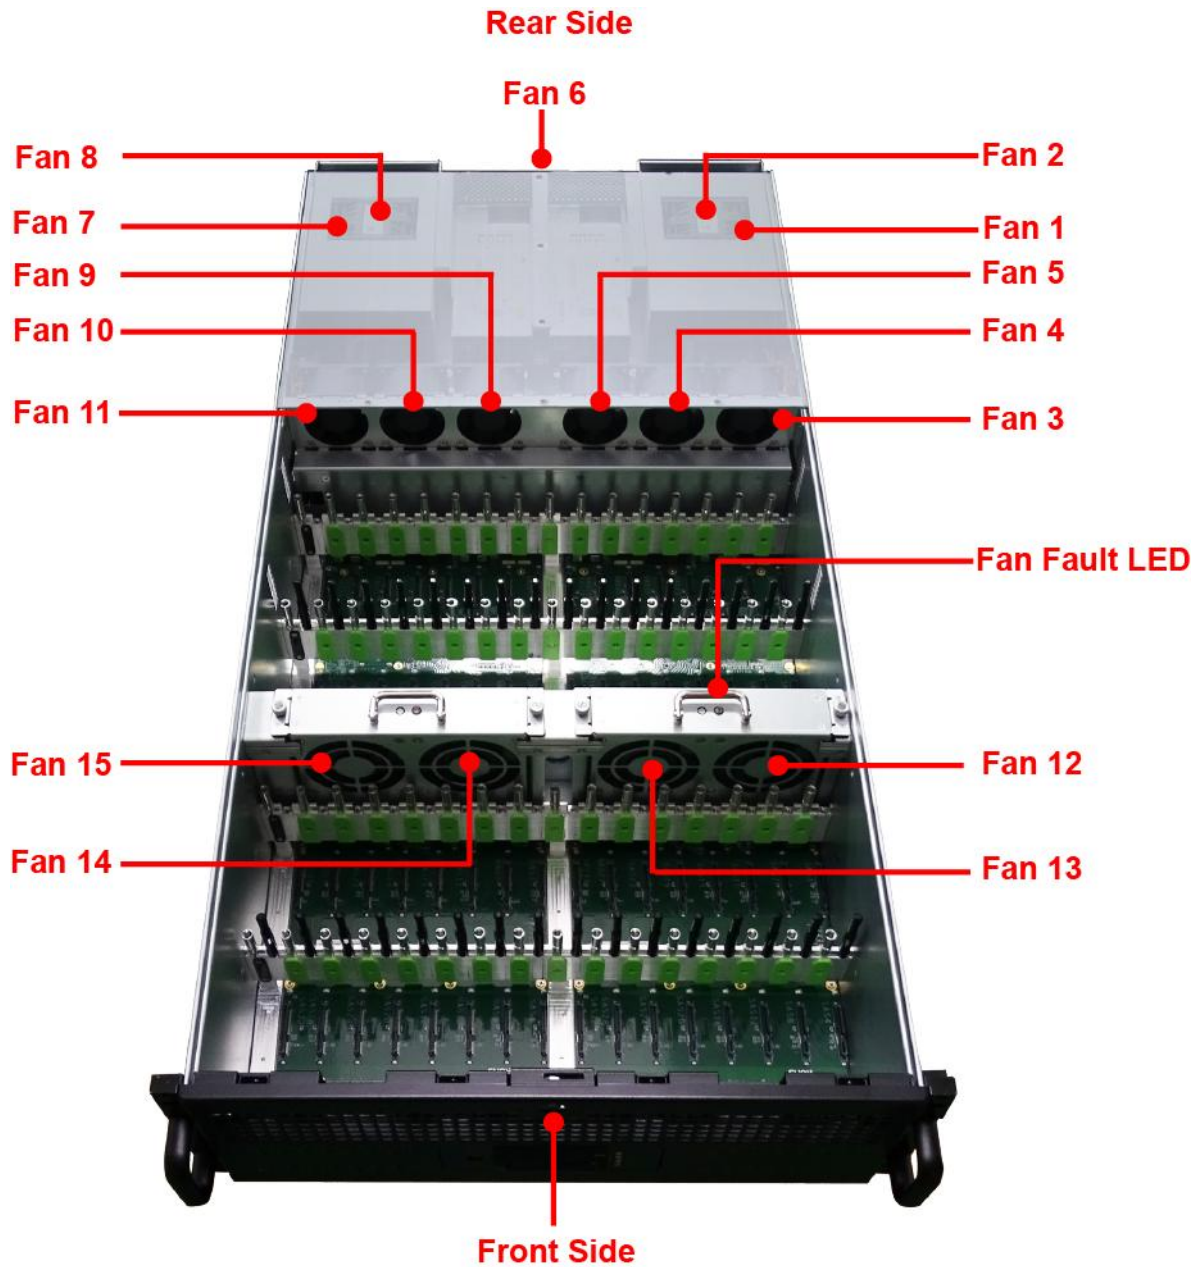

Indicator	Color	Description
Fan Fault LED	No light	Indicates the fan is normal.
	Red	Indicates the turbo fan is faulty.

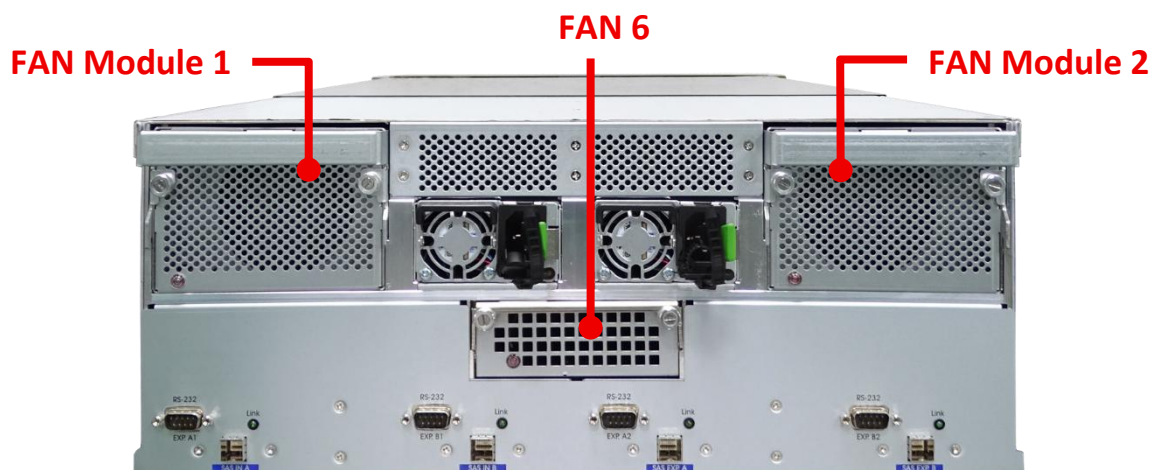

2.4.1 Fan Module

The 64bay JBOD subsystem contains **two Fan Modules**. All Fan Modules are inserted at the rear of the chassis. Each Fan Module consists of 2 fans.



Front Panel




Rear Side

2.4.2 Turbo Fan

The turbo fan (Fan 6) provides additional airflow inside the enclosure.



Turbo Fan LED

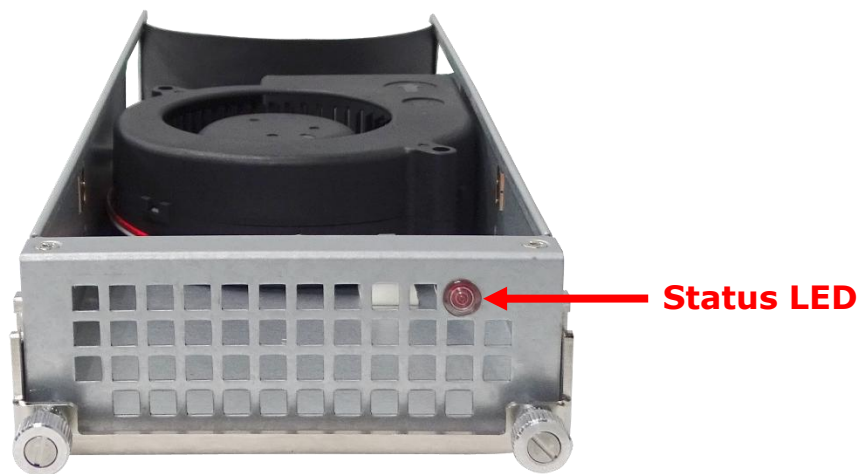


Indicator	Color	Description
Status LED	Red	Indicates the turbo fail is faulty.

2.4.3 Middle Fan

The 64bay JBOD subsystem contains **two Middle Fan Modules**. Each Fan Module consists of 2 fans.



Front Panel

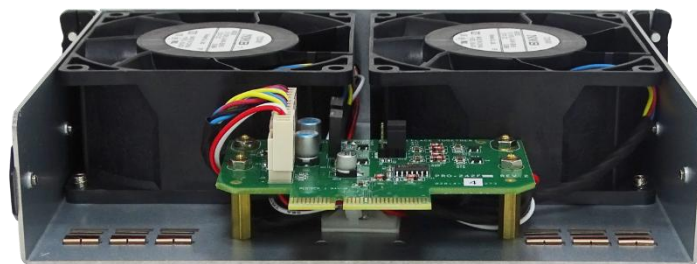


Rear Side

2.5 Disk Drive Installation into the Disk Slot

This section describes the physical locations of the hard drives supported by the subsystem and give instructions on installing a hard drive.



NOTE: When the JBOD is shipped, the disk trays are not placed in the disk slots. If all disk trays will be used to install all 64 disk drives, for quicker and easier installation of disk drives in the Disk Array, it is recommended to attach first each disk drive with HDD side brackets.

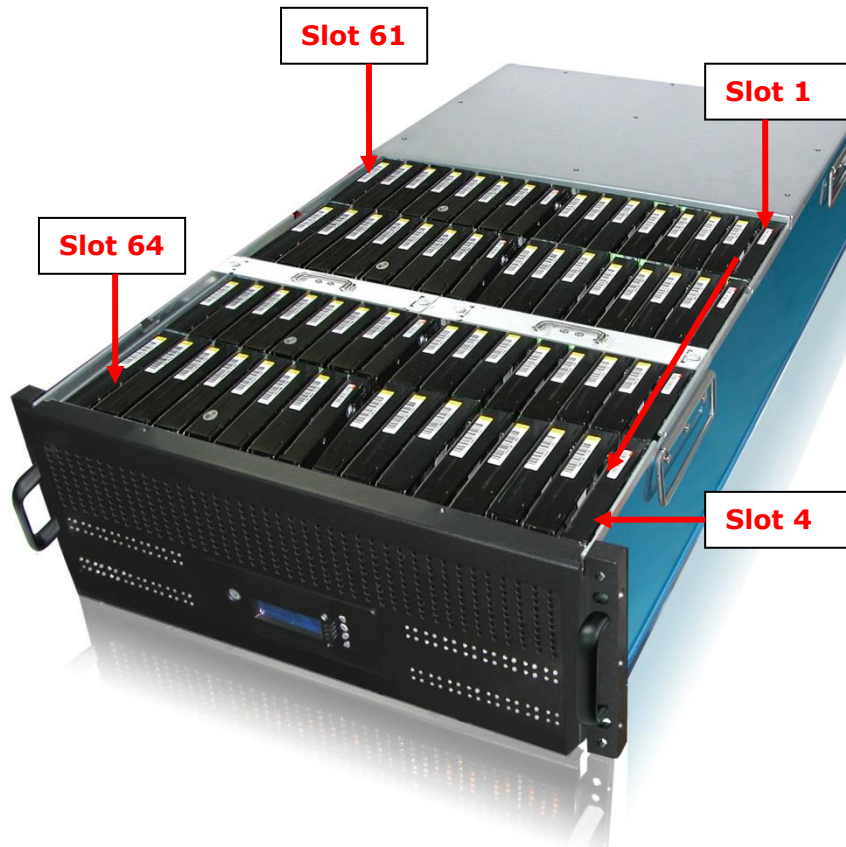

DISK SLOT NUMBERS

Rear side

61	57	53	49	45	41	37	33	29	25	21	17	13	9	5	1
62	58	54	50	46	42	38	34	30	26	22	18	14	10	6	2
63	59	55	51	47	43	39	35	31	27	23	19	15	11	7	3
64	60	56	52	48	44	40	36	32	28	24	20	16	12	8	4


Front Side



NOTE: In dual SAS Expander mode, it is strongly recommended to use SAS hard drive disks.

2.5.1 To install a disk drive in a disk tray:

1. Prepare the HDD side brackets. Remove them from the dummy disk by pushing the upper sides of the dummy disk as shown below:

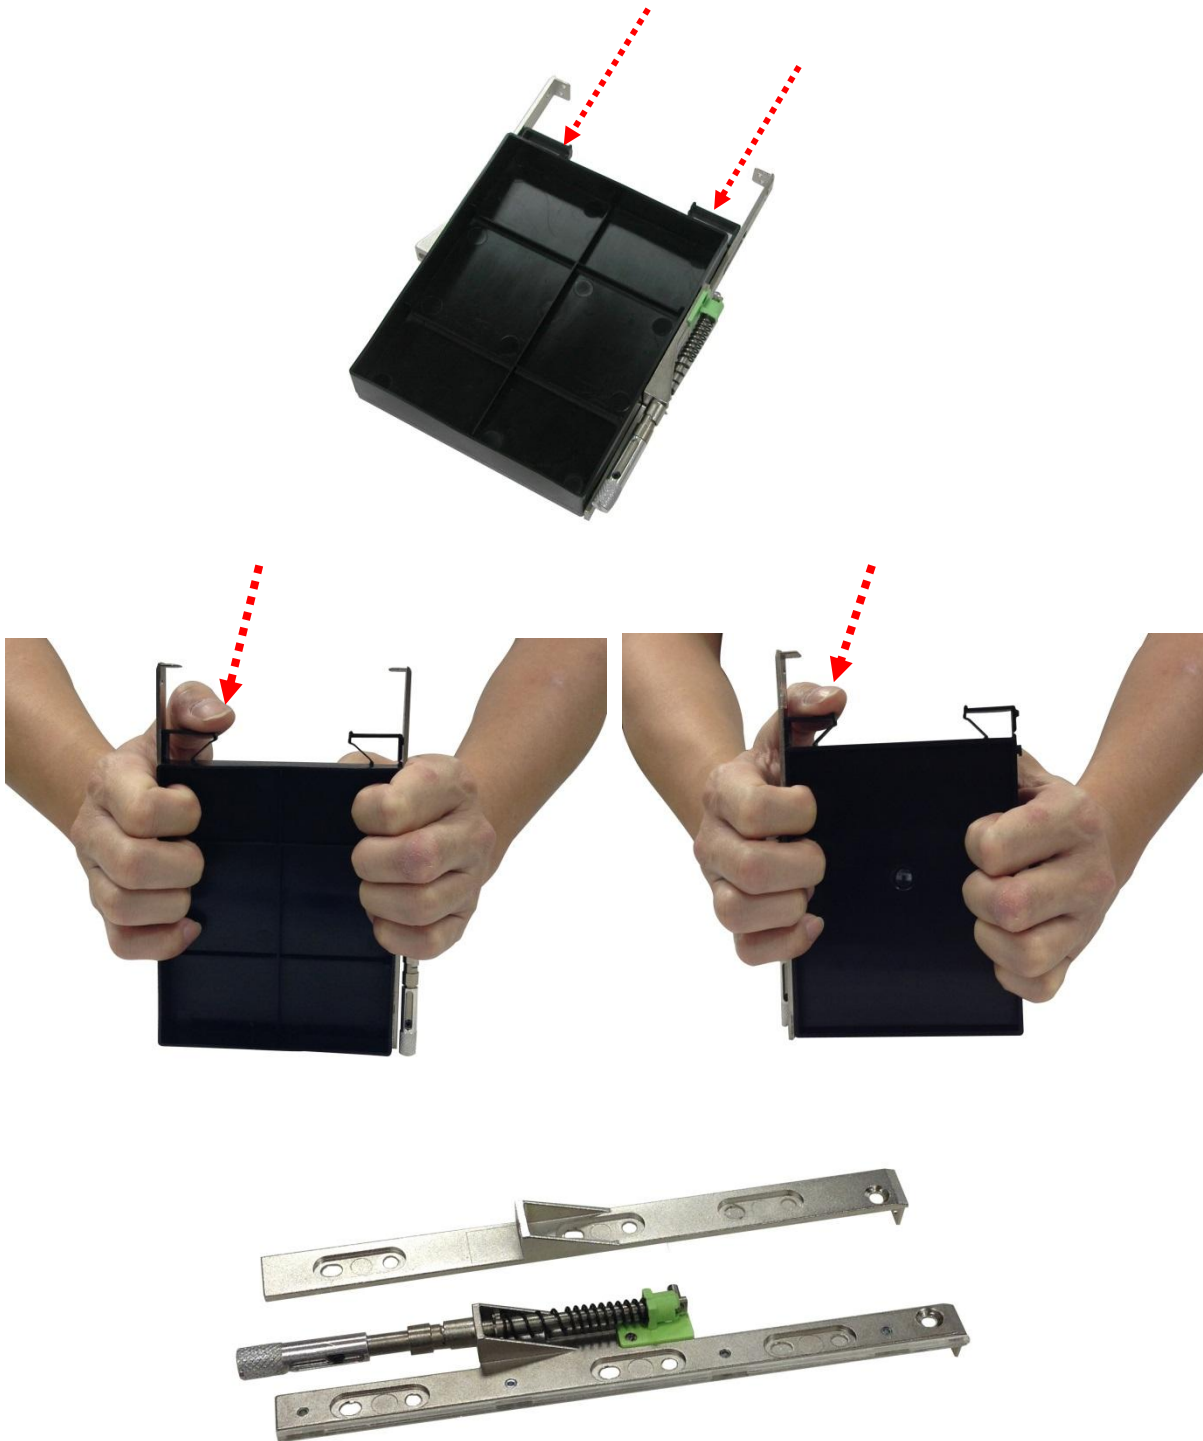

2. Place the brackets on both sides of the disk drive and secure them with screws.



2 screws #6-32 UNC L=5.0mm



2 screws #6-32 UNC L=5.0mm

3. Place the drive carefully in the disk slot.





4. Tighten the thumbscrews on the sides of the disk drive.



Chapter 3 Getting Started with the Subsystem

3.1 Installing the Rails and Mounting into Rack



NOTE: At least two persons are needed to lift the Disk Array. To reduce the weight of the Disk Array, remove the power supply modules from the rear of Disk Array. If disk drives are already installed in the disk trays, remove also the disk trays. Refer to appropriate sections on how to remove the power supply modules and how to remove the disk trays/disk drives.

NOTE: The sample model used in the following installation might not be the actual model for this manual.

NOTE: The Disk Array must be installed near the Disk Array or host system where it will be connected. A Phillips screwdriver is needed in installation.




WARNING! It is prohibited to put other enclosures on top of the 64-bay Disk Array because the total weight will not be supported by the rails.

Steps:

1. Open the rail box.
2. Remove the 2 rail assemblies and the screws/accessories from the box. Check its contents.




3. Insert three (3) M5 nuts on the 2 holes of the front left side of the rack post.

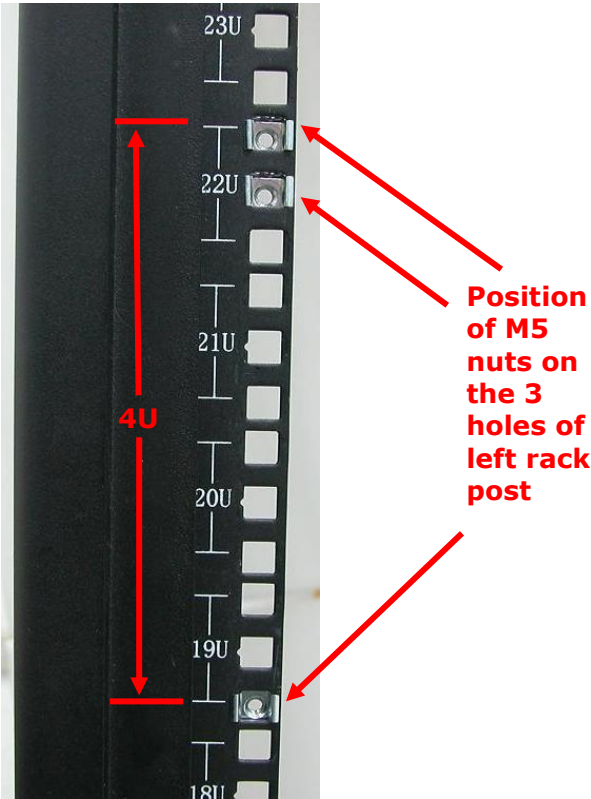


Rack Post – Front Left Side

4. Insert three (3) M5 nuts on the 2 holes of the front right side of the rack post.

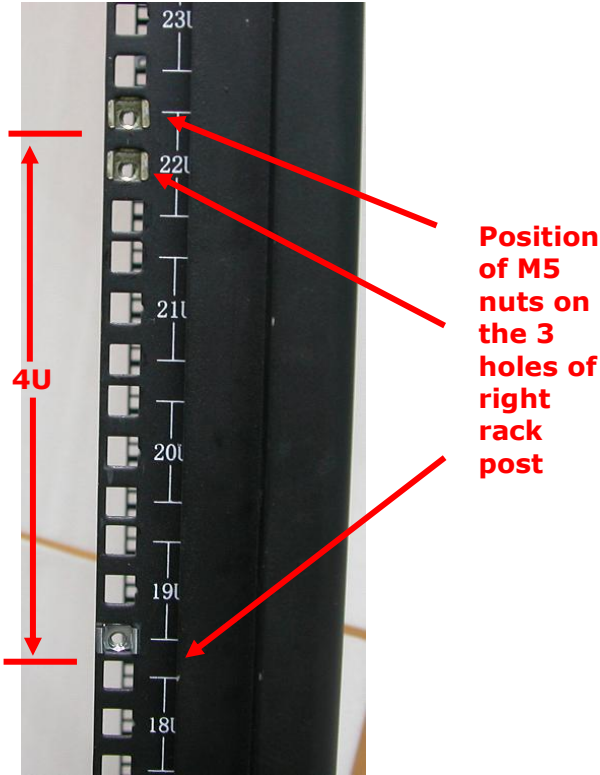

Rack Post – Front Right Side


5. Prepare the 2 rail assemblies.

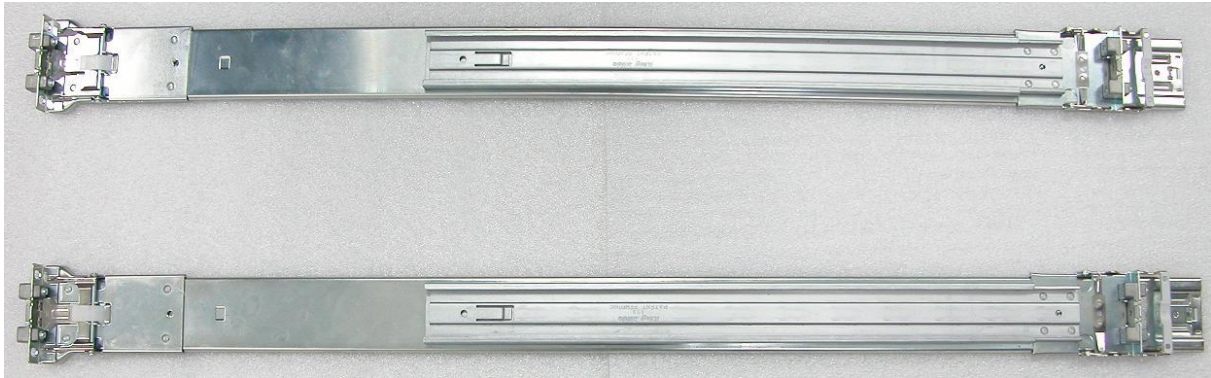


Front Side of Rail Assembly

Rear Side of Rail Assembly


6. Hold one rail assembly and install in the front left side of rack. To install, align and insert the 2 latches of the rail into the 2 holes on the rack post. Use the Lock Lever to lock the rail assembly in the left rack post.

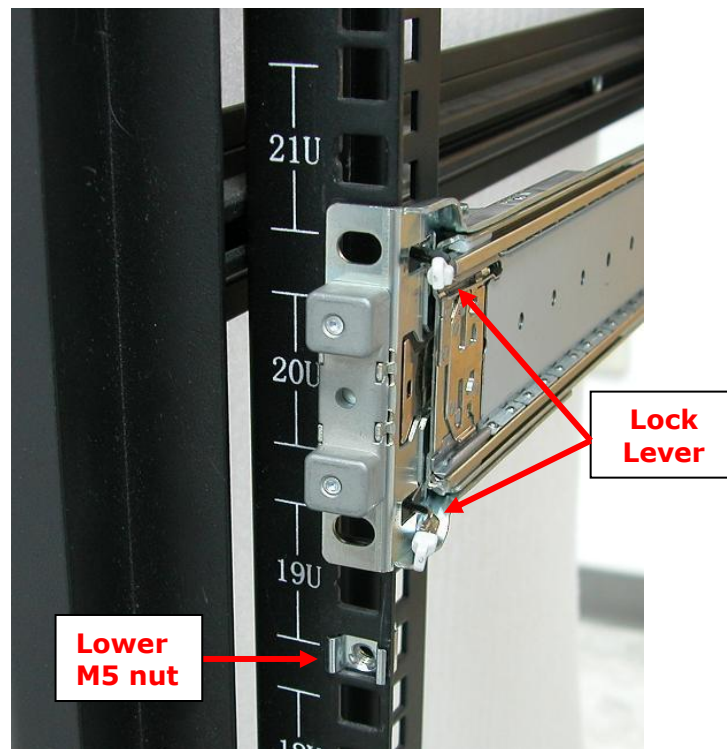

**View from Front Side of Front Left Rack Post
Lock Lever is Not Locked**

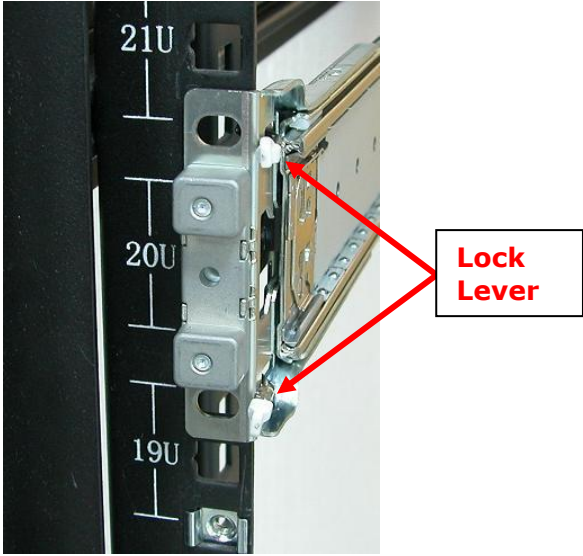


**View from Front Side of Front Left Rack Post
Lock Lever is Locked**

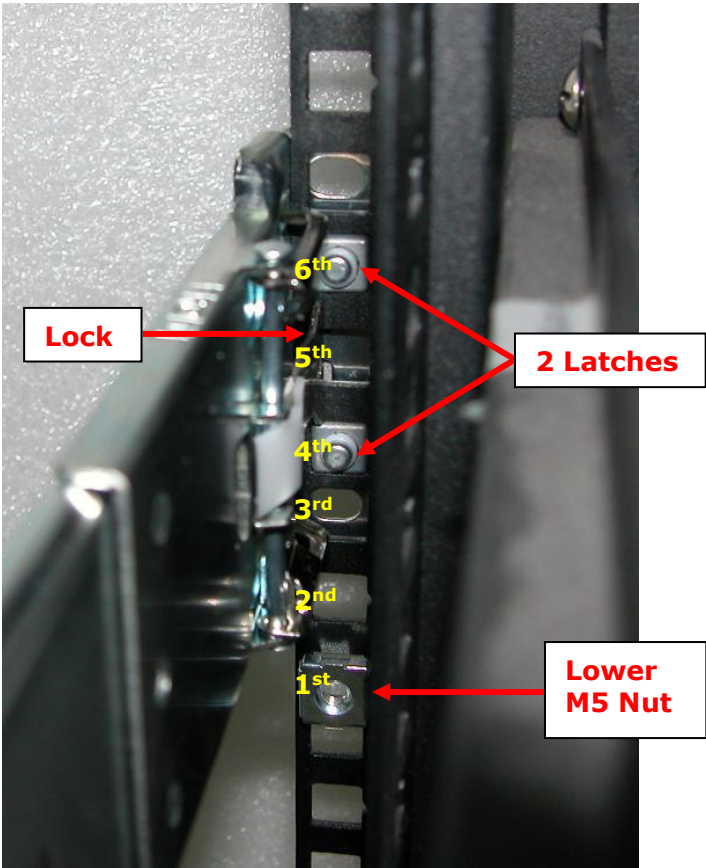


**View from Rear Side of Front Left Rack Post
2 Latches are inserted in the 4th and 6th holes from bottom (M5 nut)**


7. Install the other end of rail assembly to the left rear side. Align and insert the 2 latches on the 2 holes on the rear rack post, and then push the rail a little towards the rear side and lock the lock lever on the rack post.

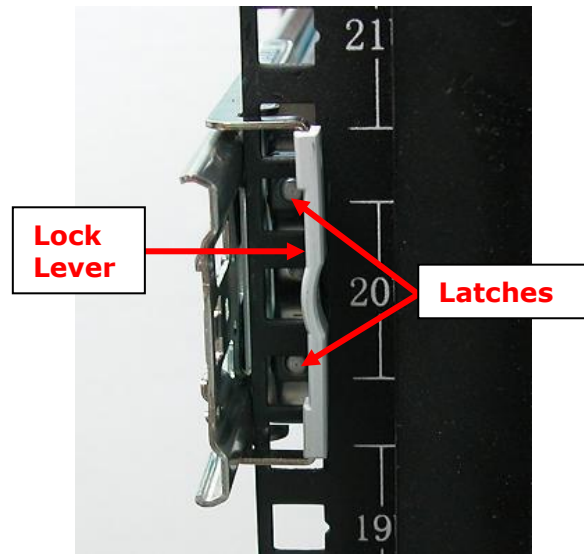

View from Rear Side of Rear Left Rack Post

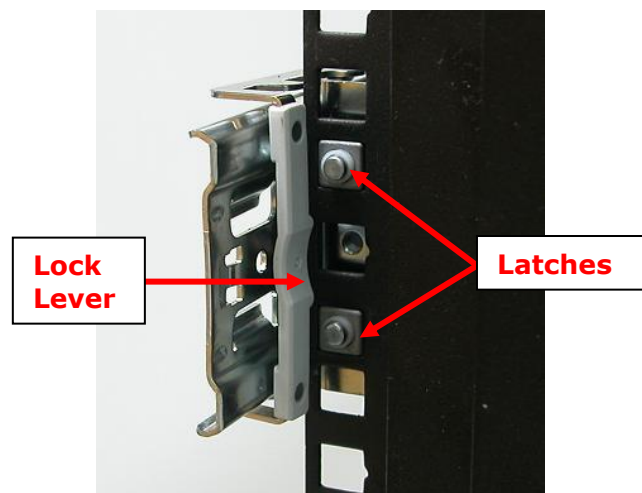


View from Rear Side of Rear Left Rack Post

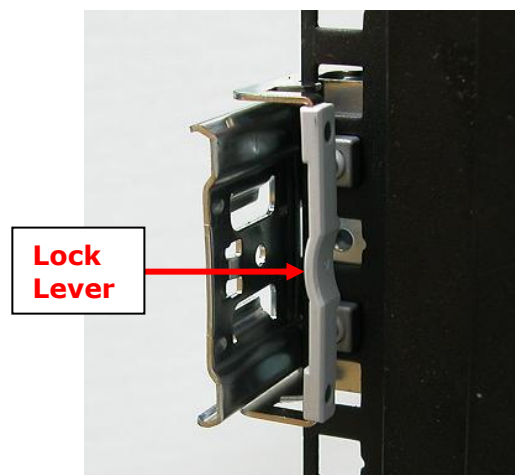


View from Rear Side of Rear Left Rack Post


8. Repeat step 6 to install the other rail assembly into the right front side.

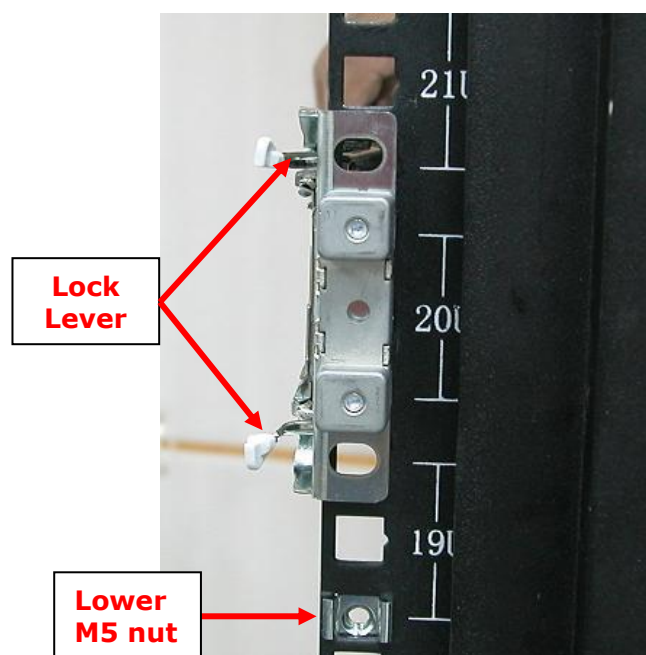

**View from Front Side of Front Right Rack Post
Lock Lever is Not Locked**

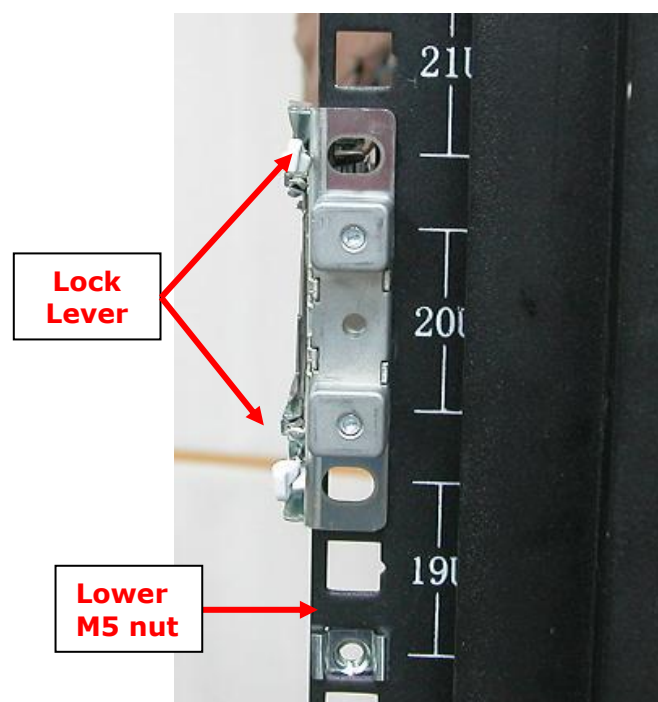


**View from Front Side of Front Right Rack Post
Lock Lever is Locked**

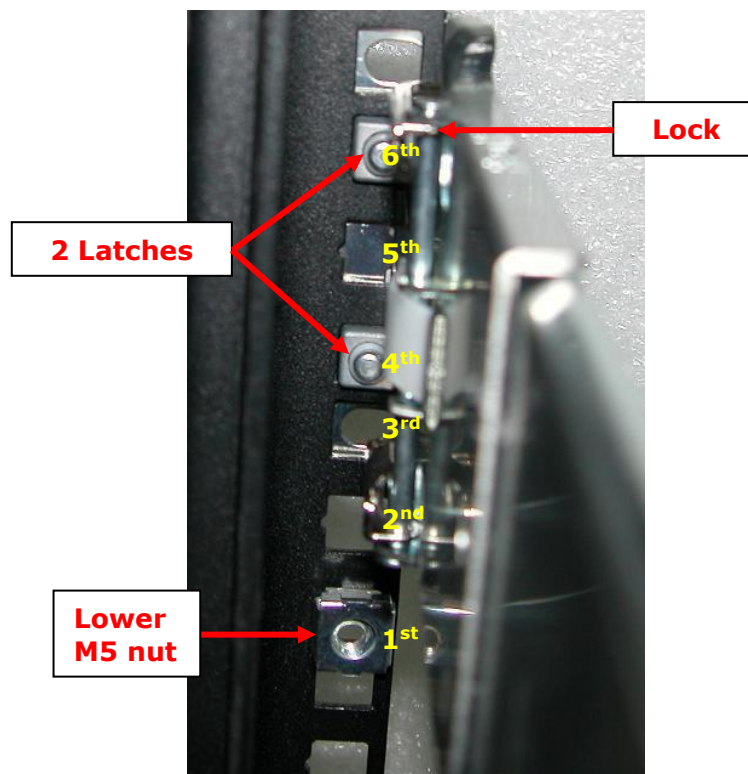


View from Rear Side of Front Right Rack Post
2 Latches are inserted in the 4th and 6th holes from bottom (M5 nut)


9. Repeat step 7 to install the other end of rail assembly to the rack post of rear right side.

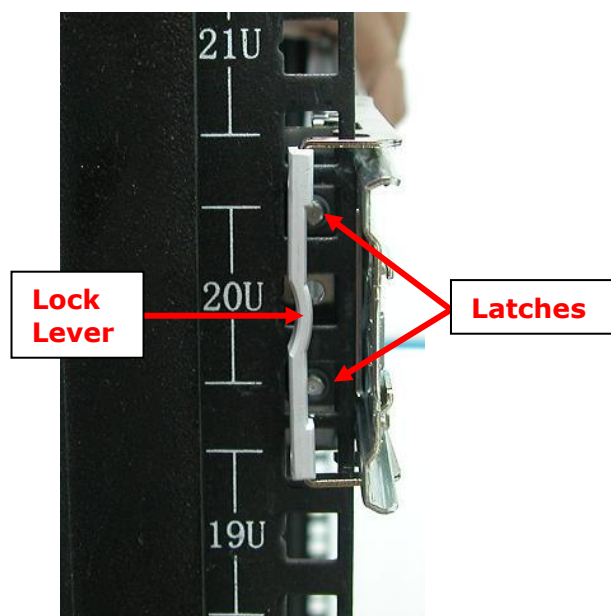

View from Rear Side of Rear Right Rack Post

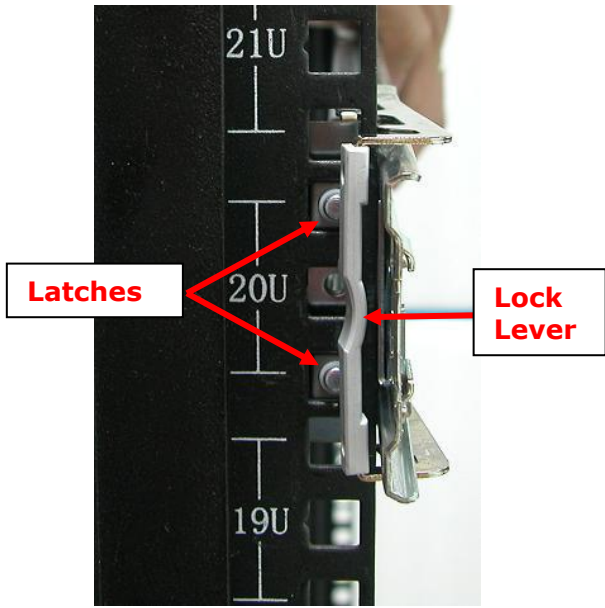


View from Rear Side of Rear Right Rack Post

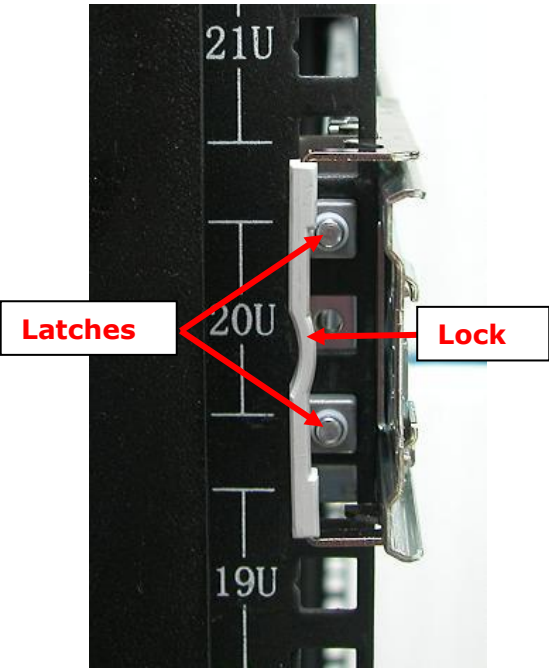


View from Rear Side of Rear Right Rack Post

10. Pull the 2 middle rail members out from the rail assembly.

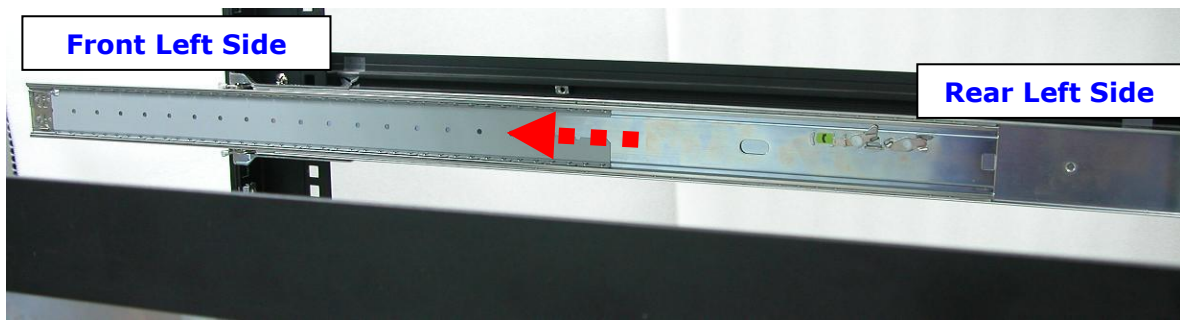

Middle Rail Member of Rail Assembly on Left Side of Rack

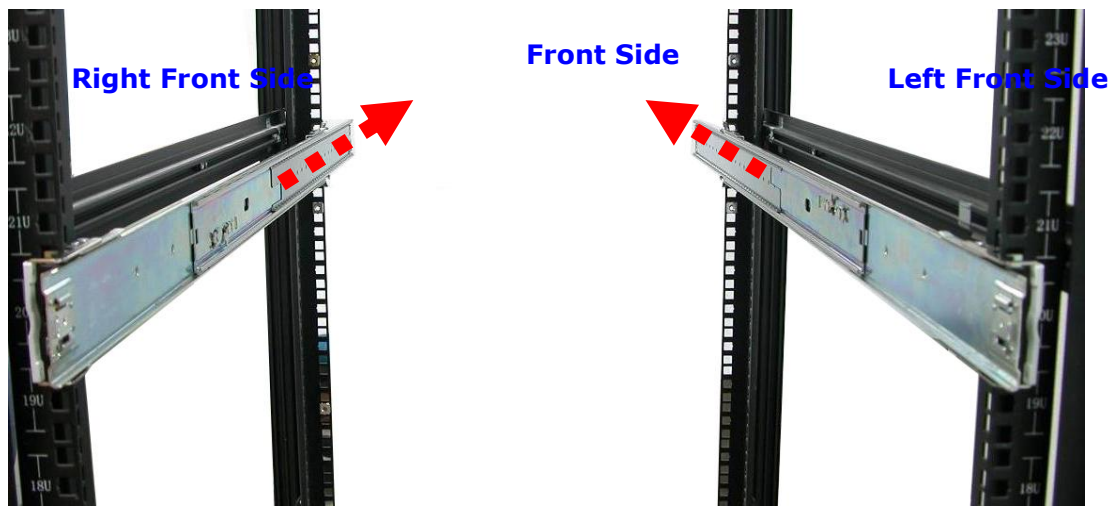


View from Rear Side

11. With at least 4 persons carrying the enclosure, insert the 2 inner rails (attached to the sides of the enclosure) into the middle rails. Slide the enclosure until it stops or about half way through.



NOTE: Be careful when inserting the 2 inner rails into the middle rails. The 2 inner rails must be parallel with the 2 middle rails so that 2 inner rails will insert and slide easily. Use hands to guide the inner rails when inserted into the middle rails.

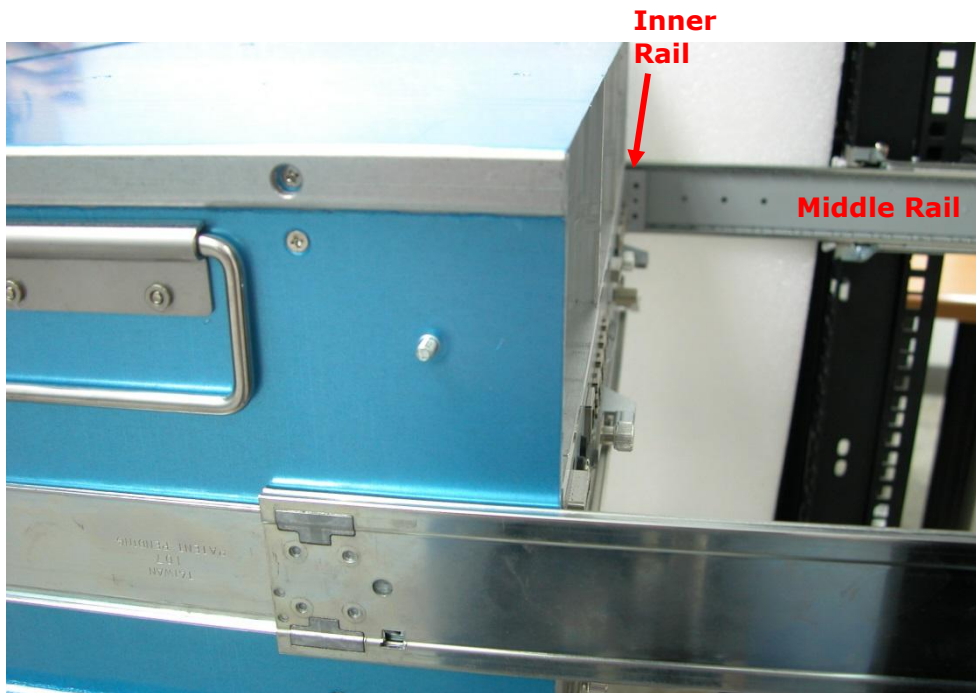

Inner Rail Aligned with and Inserted into the Middle Rail




Important: Make sure to hold the enclosure firmly in level position while inserting the enclosure in the rail. Keep holding the enclosure moved inside the rack. When the half rear side is inside the rack, you can put down the two rear handles but support in the bottom part of the enclosure is still needed so that the enclosure will not drop down.





View from Rear Side

12. Press outwards the blue locks on both sides of the inner rail members at the same time. Then push the enclosure inwards (or backwards) until it goes inside the rack.

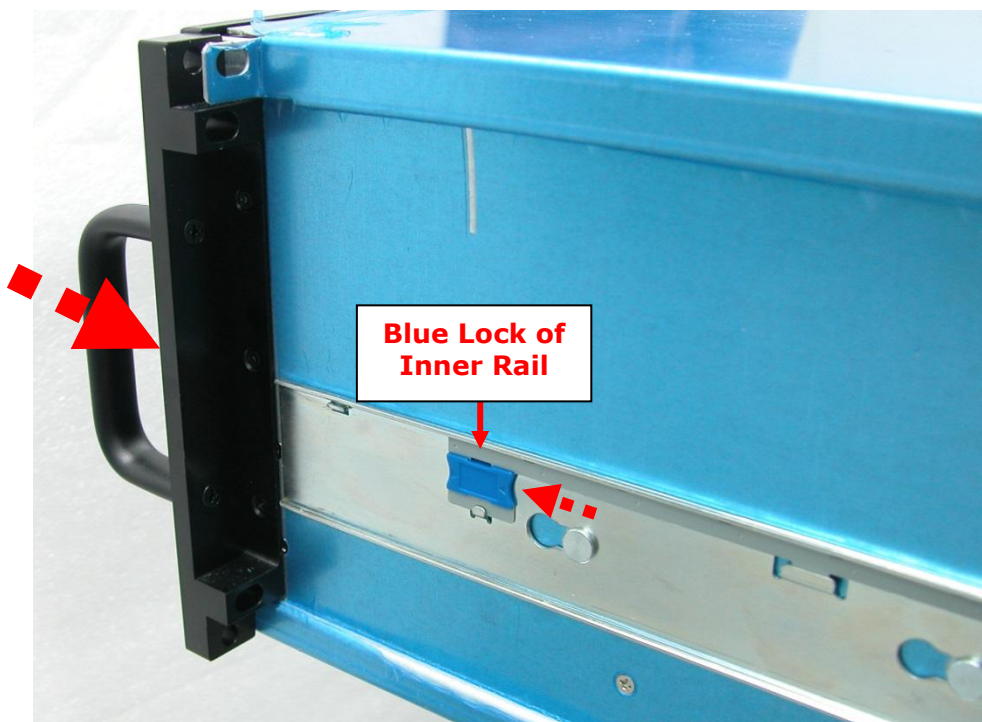

View from Right Side of Enclosure
Blue Lock of Inner Rail is Pushed a Little Outwards and
Enclosure is Pushed Inwards




**View from Rear Side of Rack Cabinet
Enclosure is Pushed Inwards**

13. Insert the power supply modules.



14. Use six (6) M5 screws to lock the enclosure into the rack post, one screw in each corner. Note that the screw driver will need to pass through the corner hole of front panel for the two upper corner holes on both sides.

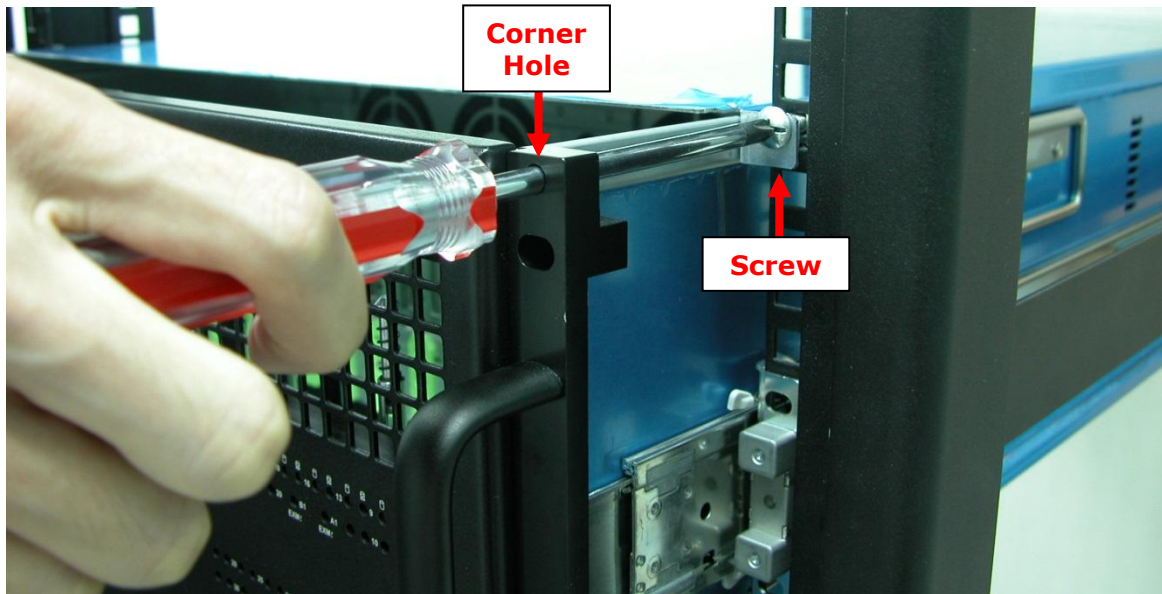

Front Left Side




Front Right Side

15. Open the top cover and re-insert the disk drives / disk trays, if disk drives/disk trays were previously removed. Then close the top cover.

3.2 Removing the Disk Array from the Rack

1. Remove the six screws in the front corner.

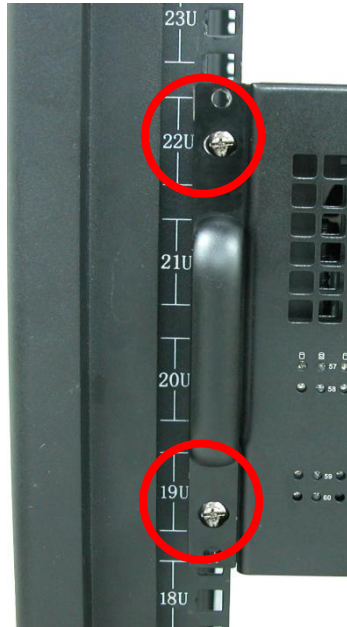

Front Left Side



Front Right Side


2. Remove the power supplies in the rear and the disk drives from the disk slots.



3. Carefully pull the subsystem.



4. Push the white lock to release the subsystem from the rail.

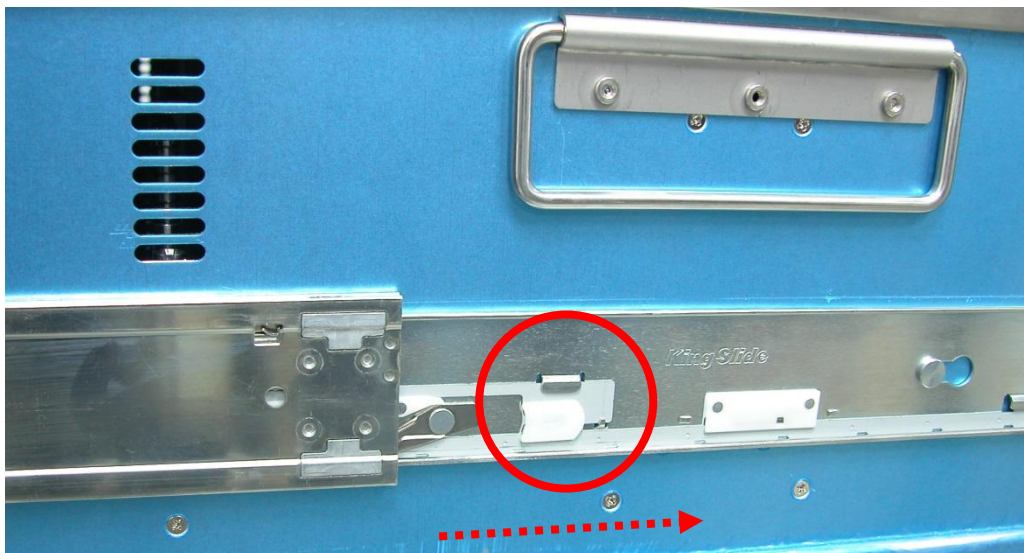

3.3 Preparing the JBOD and Connecting to RAID Subsystem

1. Install the disk drives, if not yet installed. Refer to Section 2.5 Disk Drive Installation for detailed information.
2. Connect one end of SAS cable to the **SAS In Port** of the JBOD subsystem enclosure and the other end to the **SAS Expansion Port** of the RAID subsystem enclosure.

3.4 Preparing the JBOD and Connecting to SAS HBA in Host System

1. Install the disk drives, if not yet installed. Refer to Section 2.5 Disk Drive Installation for detailed information.
2. Connect one end of SAS cable to the **SAS In Port** of the JBOD subsystem enclosure and the other end to the SAS HBA on the Host system.


3.5 Powering On

1. Plug in all the power cords into the AC Power Input Socket located at the Power Supply. The main switch button in the front panel will flash blue indicating that the power cords are inserted.



NOTE: The subsystem is equipped with redundant, full range power supplies with PFC (power factor correction). The system will automatically select voltage.

Power Supply 1 **Power Supply 2**

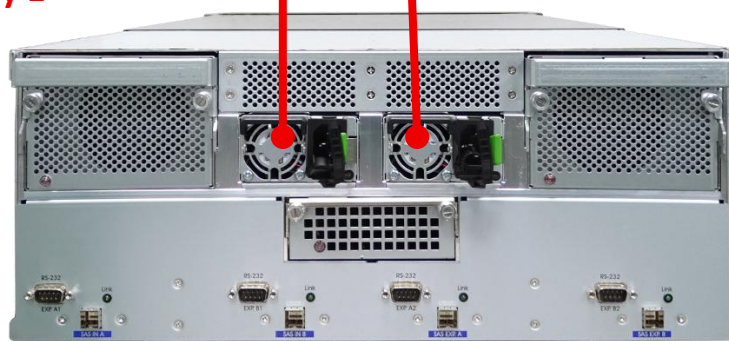

2. Push the main switch button in the front panel to power on.

Main Switch



3. Allow the machine a few moments to initialize before using it. The main switch button will continue flashing blue until the system is finished checking each disk slot.



NOTE: The system will initialize after turning on the Main Switch. Each disk slot will be checked during subsystem initialization.

3.6 Powering Off



IMPORTANT: When powering off the JBOD Subsystem, turn off first the Main Switch in the front panel and allow at least 4 minutes for the subsystem to shutdown properly. The main switch button in the front panel will flash blue.

When JBOD Subsystem has totally powered down, the main switch button in the front panel will still flash blue until the power cords are pulled out from the sockets.


Chapter 4 Maintenance

4.1 Upgrading the JBOD Controller Firmware



NOTE: The JBOD firmware upgrade procedure must be done four times. First is the Expander A1, next is the Expander B1 and A2, then last the Expander B2.


NOTE: There must be no I/O in the disk drives in the JBOD subsystem (RAID volumes should not be accessed) during firmware upgrade.

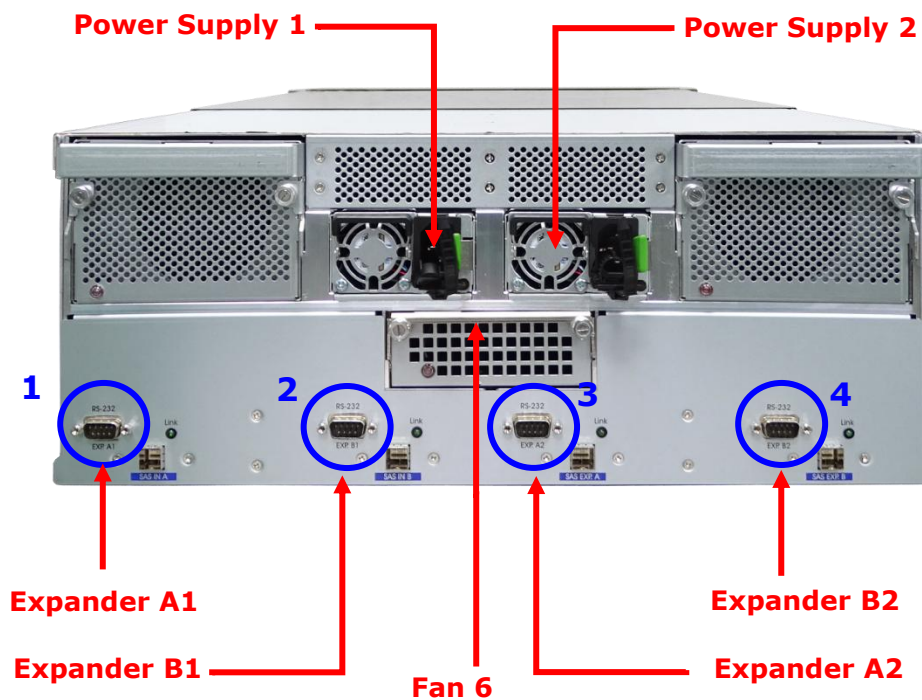

NOTE: It is important to stop I/O access to JBOD subsystem during firmware upgrade.


Steps:

1. Please use the RS232 cable (DB9 to DB9) to connect Expander A1 RS232 Port and PC COM1 Port (or change to other COM Port as necessary).
2. Open Windows HyperTerminal or other Program. Connect using COM1 (COM Port used in Step1), Baud Rate: 115200, n, 8, 1, Flow Control: None.
3. Power on RAID subsystem.
4. Please type Password : "00000000" , than press "Enter" in command line.
5. Please type "system upgrade", than press "Enter" in command line.

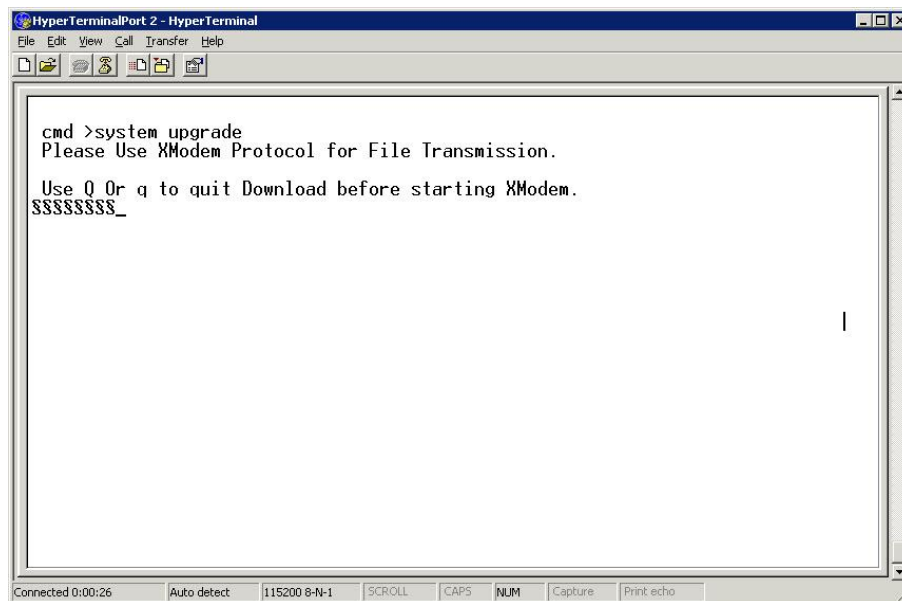


6. Select Transfer & Send File.



You must finish within 25 seconds

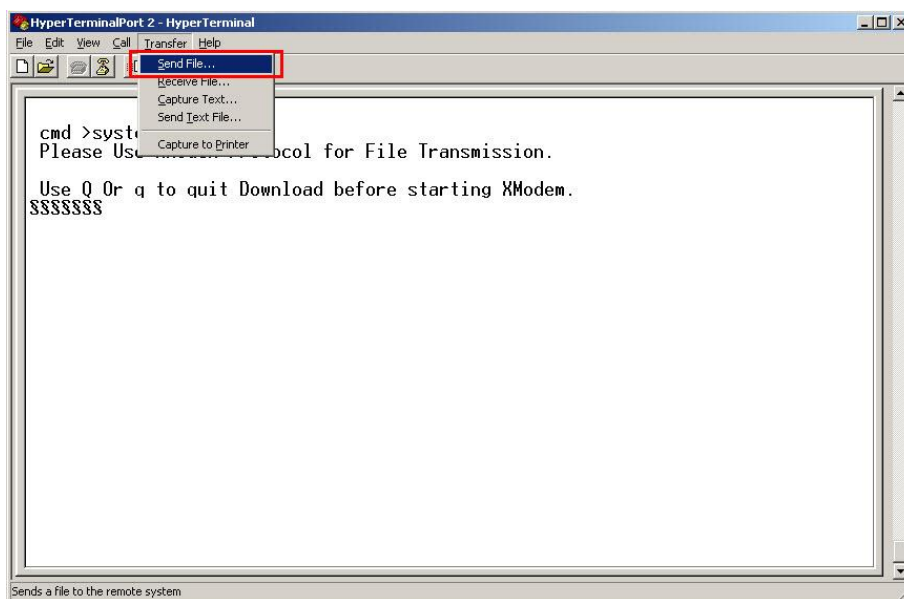


7. Select your firmware file path, and select Xmodem in the communication protocol, and click transfer button.

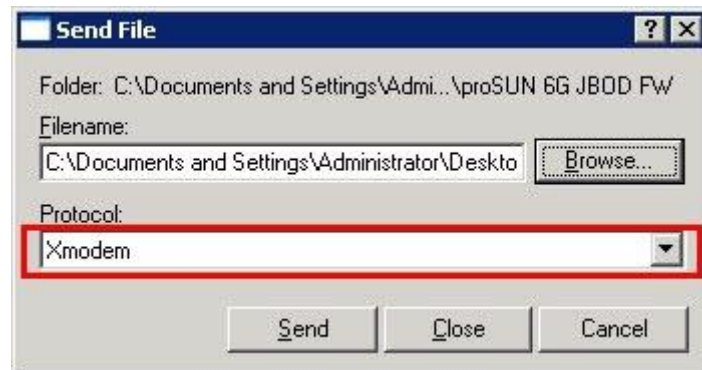

- Wait for the transfer of file to complete.

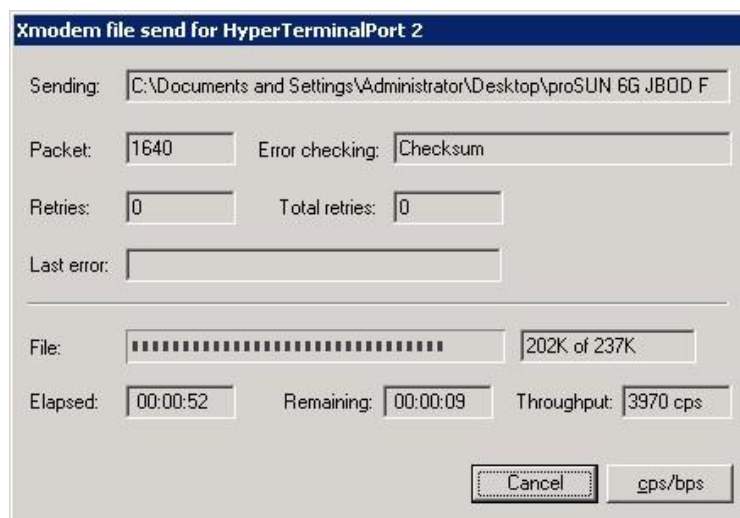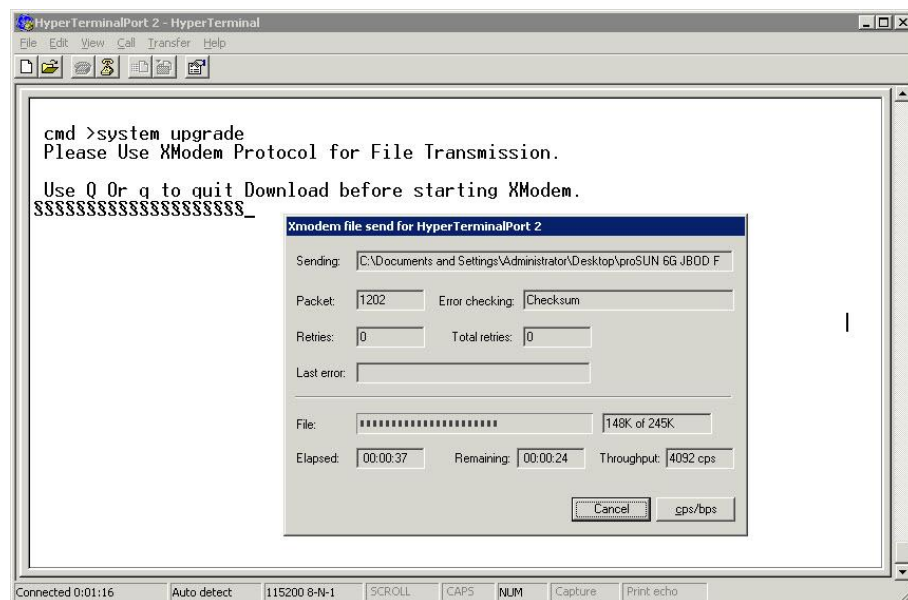

9. When the transfer and firmware update is complete, please power cycle the JBOD.

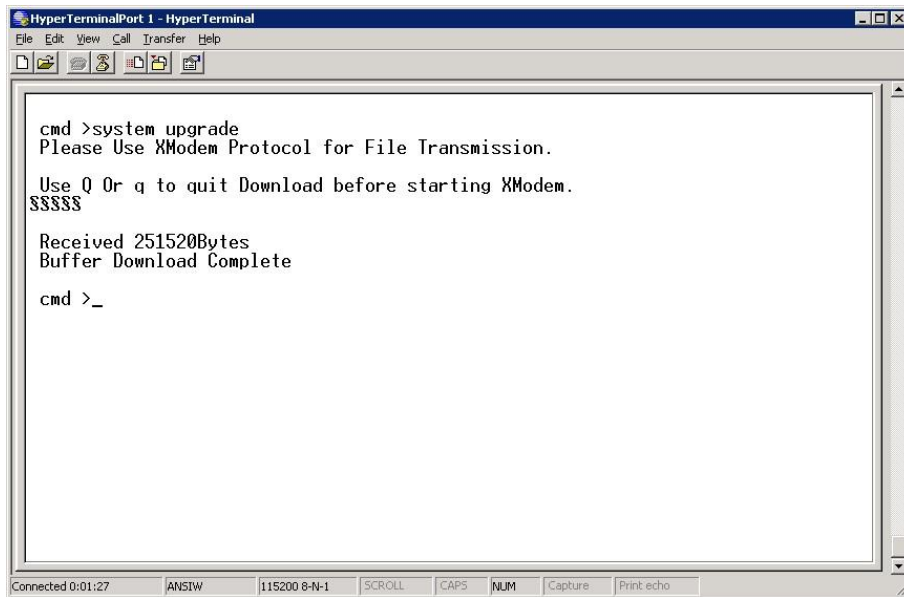

```

cmd >system upgrade
Please Use XModem Protocol for File Transmission.

Use Q Or q to quit Download before starting XModem.
$$$$$


Received 251520Bytes
Buffer Download Complete

cmd >_

```

Connected 0:01:27 | ANSIW | 115200 8-N-1 | SCROLL | CAPS | NUM | Capture | Print echo

10. In command line, type "system info", you can see the Expander firmware version.

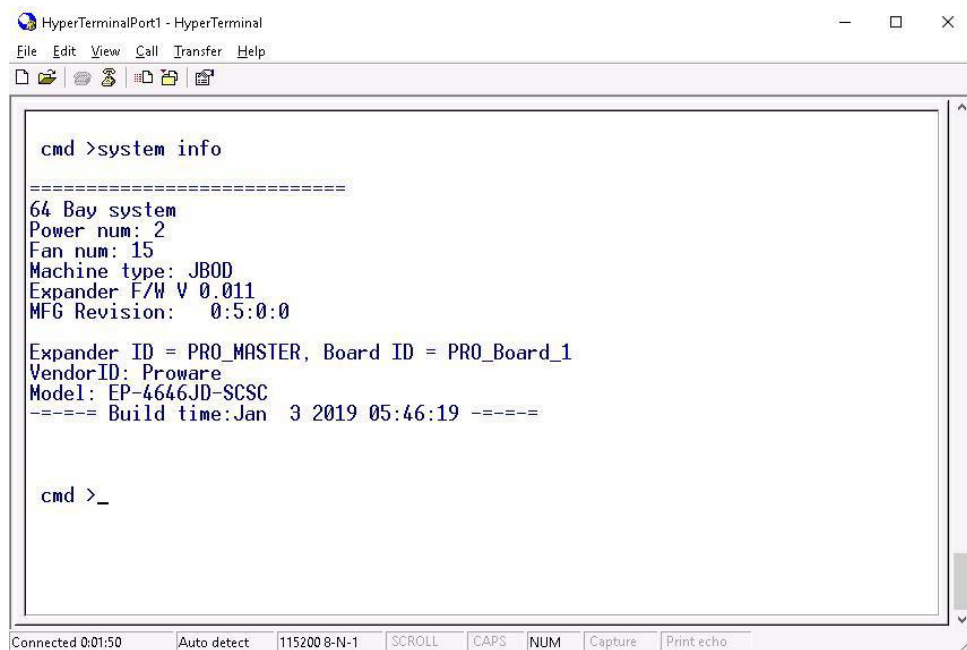

```

cmd >system info

=====
64 Bay system
Power num: 2
Fan num: 15
Machine type: JBOD
Expander F/W V 0.011
MFG Revision: 0:5:0:0

Expander ID = PRO_MASTER, Board ID = PRO_Board_1
VendorID: Proware
Model: EP-4646JD-SCSC
----- Build time:Jan 3 2019 05:46:19 -----

cmd >_

```

Connected 0:01:50 | Auto detect | 115200 8-N-1 | SCROLL | CAPS | NUM | Capture | Print echo